HDCVI کاتالوگ محصولات داهوا

PRODUCT SELECTION

شهریور ۱۴۰۰

HCVI Camera / Full Color / Recorders

HAC-B2A21
2MP HDCVI IR Bullet Camera
> Max. 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 20m, Smart IR
> IP67, DC12V

HAC-HFW1200R
2MP HDCVI IR Bullet Camera
> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 20m, Smart IR
> IP67, DC12V

HAC-HFW1200TL
2MP HDCVI IR Bullet Camera
> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 40m, Smart IR
> IP67, DC12V

HAC-HFW1200T
2MP HDCVI IR Bullet Camera
> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 30m, Smart IR
> IP67, DC12V

HAC-HFW1200T-A
2MP HDCVI IR Bullet Camera
> Max 30fps@1080P
> HD and SD output switchable
> Built in Mic
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 30m, Smart IR
> IP67, DC12V

HAC-HFW1400T
4MP HDCVI IR Bullet Camera
> Max 30fps@4MP
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 30m, Smart IR
> IP67, DC12V

HAC-HFW1500T
5MP Starlight HDCVI IR Bullet Camera
> Max 25fps@5MP (16:9 video output)
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm optional)
> Max. IR length 30 m, Smart IR
> IP67, DC12V

HAC-HFW1200D
2MP HDCVI IR Bullet Camera
> Max 30fps@1080P
> CVI/CVBS/AHD/TVI switchable
> 3.6mm fixed lens (6mm, 8mm optional)
> Max. IR length 80m, Smart IR
> IP67, DC12V

HAC-HFW1230D
2MP Starlight HDCVI IR Bullet Camera
> Starlight
> Max. 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (6mm, 8mm optional)
> Max. IR length 80m, Smart IR
> IP67, DC12V

HAC-HFW1400D
4MP HDCVI IR Bullet Camera
> Max 30fps@4MP
> HD and SD output switchable
> 3.6mm fixed lens (6mm, 8mm optional)
> Max. IR length 80m, Smart IR
> IP67, DC12V

HAC-HFW1500D
5MP Starlight HDCVI IR Bullet Camera
> Max 25 fps@5MP (16:9 video output)
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (6 mm, 8 mm optional)
> Max. IR length 80 m, Smart IR
> IP67, DC12V

HAC-HFW1230TH-I4
2MP Starlight HDCVI IR Bullet Camera
> Starlight
> Max. 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Max. IR length 40m, Smart IR
> IP67, DC12V

HAC-HFW1231TLM-I6(-A)
2MP Starlight HDCVI IR Bullet Camera
> Max 30 fps@1080P
> Starlight, 130 dB true WDR, 3D NR
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> CVI/CVBS/AHD/TVI switchable
> Super Adapt
> Built-in mic (-A)
> Max. IR length 60 m, Smart IR
> IP67, DC12V

HAC-HFW1231TM-I8-A
2MP Starlight HDCVI IR Bullet Camera
> Max 30 fps@1080p
> Starlight, 130 dB true WDR, 3D NR
> 3.6 mm fixed lens (2.8 mm, 6 mm, 8 mm optional)
> CVI/CVBS/AHD/TVI switchable
> Super Adapt
> Built-in mic
> Max. IR length 80 m, Smart IR
> IP67, DC 12 V

HAC-HDW1200R

2MP HDCVI IR Eyeball Camera

> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm optional)
> Max. IR length 20m, Smart IR
> IP50,DC12V

HAC-HDW1200M

2MP HDCVI IR Eyeball Camera

> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm optional)
> Max. IR length 30m, Smart IR
> IP67, DC12V

HAC-HDW1200EM-A

2MP HDCVI IR Eyeball Camera

> Max 30fps@1080P
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Built-in mic(-A)
> Max. IR length 50m, Smart IR
> IP67, DC12V

HAC-HDW1400EM-A

4MP HDCVI IR Eyeball Camera

> Max 30fps@4MP
> HD and SD output switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Built-in mic(-A)
> Max. IR length 50m, Smart IR
> IP67, DC12V

HAC-HDW1200TQ-A

2MP HDCVI Quick-to-install IR Eyeball Camera

> Max 30fps@1080P
> Quick-to-install eyeball saves installation time
> CVI/CVBS/AHD/TVI switchable
> 3.6mm fixed lens (2.8mm, 6mm optional)
> Built-in mic(-A)
> Max. IR length 40m, Smart IR
> IP67, DC12V

HAC-HDW1500TQ-A

5MP Starlight HDCVI Quick-to-install IR Eyeball Camera

> Max 25 fps@5MP (16:9 video output)
> Quick-to-install eyeball saves installation time
> CVI/CVBS/AHD/TVI switchable
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> Built-in mic(-A)
> Max. IR length 40 m, Smart IR
> IP67, DC12V

HAC-HDW1500TMQ(-A)

5MP Starlight HDCVI

> Max 25 fps@5MP (16:9 video output)
> Quick-to-install eyeball saves installation time
> CVI/CVBS/AHD/TVI switchable
> Quick-to-install eyeball saves installation time
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> Built-in mic(-A)
> Max. IR length 60 m, Smart IR
> IP67, DC12V

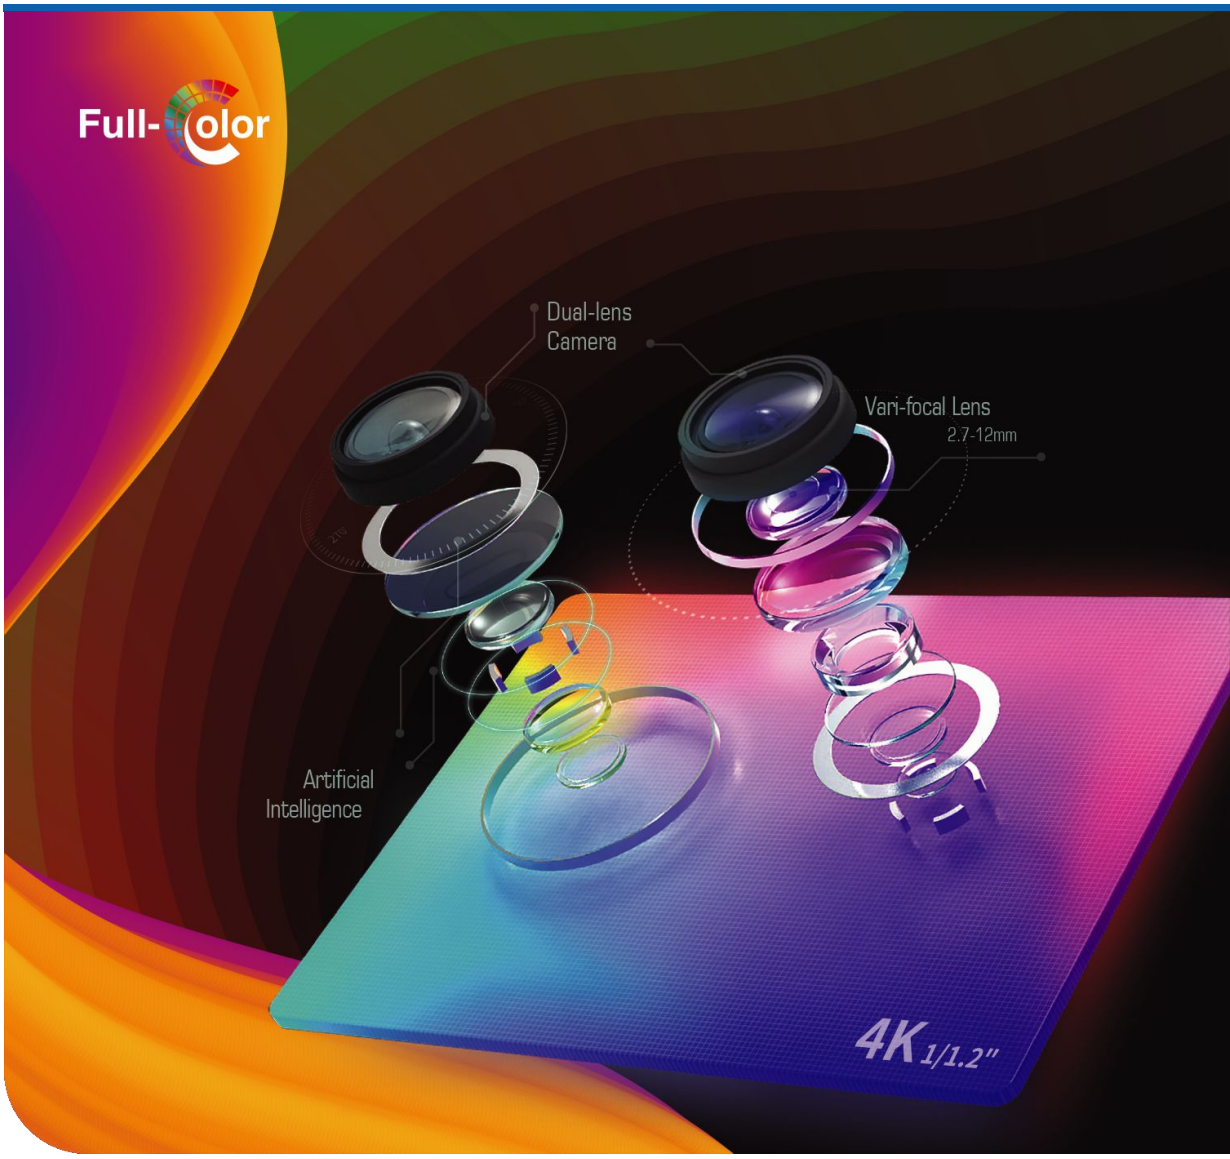

Explore New Innovations with Full-color 2.0 Camera

HAC-HFW1209C-LED

2MP Full-color HDCVI Bullet Camera

> 24/7 color imaging
> 20 m illumination distance
> Max. 30fps@1080P
> CVI/CVBS/AHD/TVI switchable
> Fixed lens (2.8 mm;3.6 mm optional)
> IP67, 12V±30% DC

HAC-HFW1209CM(-A)-LED

2MP Full-color HDCVI Bullet Camera

> 24/7 color imaging
> 20 m illumination distance
> Max. 30 fps@1080p
> Built-in mic (-A)
> CVI/CVBS/AHD/TVI switchable
> Fixed lens (2.8 mm; 3.6 mm optional)
> IP67, 12V±30% DC

DH-HAC-HFW1209TLM(-A)-LED

2MP Full-color HDCVI Bullet Camera

> 24/7 color imaging
> 40 m illumination distance
> Max. 30 fps@1080p
> Built-in mic (-A)
> CVI/CVBS/AHD/TVI switchable
> Fixed lens (3.6 mm; 6 mm optional)
> IP67, 12V±30% DC

HAC-HDW1209TLQ-LED

2MP Full-color HDCVI

> 24/7 color imaging
> 20 m illumination distance
> Max. 30fps@1080P
> Quick-to-install eyeball saves installation time
> CVI/CVBS/AHD/TVI switchable
> Fixed lens (2.8 mm;3.6 mm optional)
> IP67, 12V±30% DC

XVR5104HS-I2

4 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 6 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth
> Up to 2 channels video stream Perimeter Protection
> Up to 4 channels video stream SMD Plus
> Up to 1 channel video stream human face recognition
> IoT & POS functionalities

XVR5108HS-I2

8 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth
> Up to 2 channels video stream (analog channel) Perimeter Protection
> Up to 8 channels video stream (analog channel) SMD Plus
> Up to 2 channels video stream (analog channel) human face recognition
> IoT & POS functionalities

XVR5108HS-4KL-I2

8 Channel Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth
> Up to 2 channels video stream (analog channel) Perimeter Protection
> Up to 8 channels video stream (analog channel) SMD Plus
> Up to 2 channels video stream (analog channel) human face recognition
> IoT & POS functionalities

XVR5116HS-I2

16 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
> Up to 2 channels video stream (analog channel) Perimeter Protection
> Up to 16 channels video stream (analog channel) SMD Plus
> Up to 2 channels video stream (analog channel) human face recognition
> IoT & POS functionalities

XVR5216AN-X

16 Channel Penta-brid 1080P Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 24 channels IP camera inputs, each channel up to 6MP; Max 96Mbps Incoming Bandwidth
> Smart Search and Intelligent Video System

XVR5216AN-I2

16 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
> Up to 2 channels video stream Perimeter Protection
> Up to 16 channels video stream SMD Plus
> Up to 2 channels video stream human face recognition
> IoT & POS functionalities

XVR5232AN-X

32 Channel Penta-brid 1080P Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 32 channels IP camera inputs, each channel up to 6MP; Max 128Mbps Incoming Bandwidth
> Smart Search and Intelligent Video System

XVR5232AN-I2

32 Channel Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder

> H.265+/H.265 dual-stream video compression
> Supports HDCVI/AHD/TVI/CVBS/IP video inputs
> Max 32 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
> Up to 2 channels video stream Perimeter Protection
> Up to 16 channels video stream SMD Plus
> Up to 2 channels video stream human face recognition
> IoT & POS functionalities

IP VIDEO DISTRIBUTION PRODUCTS

کاتالوگ محصولات داهوا

شهریور ۱۴۰۰

Network Cameras / PTZ / NVR

IPC-HFW1230S1

2MP Entry IR Fixed-Focal Bullet Netwok Camera

> 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
> Outputs max. 2MP (1920 × 1080) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in efficient IR illuminator, and the max. illumination distance is 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking,applicable to various monitoring scenes
> Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access
> 12V DC/PoE power supply
> IP67 protection

IPC-HFW1230S

2MP IR Mini-Bullet Network Camera

> 1/2.7" 2Megapixel progressive CMOS
> H.265& H.264 dual-stream encoding
> 25/30fps@1080P(1920×1080)
> DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
> Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
> 2.8 mm fixed lens (3.6mm optional)
> Max IR LEDs Length 30m
> IP67, PoE

IPC-HFW2431S-S

4MP Lite IR Fixed-focal Bullet Network Camera

> 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
> Outputs 4MP (2560 × 1440)@25/30fps, Max. supports 4MP (2688 × 1520)@20 fps
> H.265 codec, high compression ration, ultra-low bit rate
> Built-in IR LED, max IR distance: 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering no SD card, SD card full, SD card error, network disconnected IP conflict, illegal access, voltage detection
> Supports max. 256 GB Micro SD card
> 12V DC/PoE power supply
> IP67 protection

IPC-HFW2531S-S-S2

5MP Lite IR Fixed-focal Bullet Network Camera

> 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
> Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 ×1520 (2688 × 1520) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in IR LED, max IR distance: 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access ,voltage detection
> Supports max. 256 GB Micro SD card
> 12V DC/PoE power supply
> IP67 protection

IPC-HFW4431T-S

4MP WDR IR Mini Bullet Network Camera

> 1/3" 4Megapixel progressive scan CMOS
> H.265&H.264 triple-stream encoding
> 25/30fps@4M(2688×1520)
> Smart Detection supported
> WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
> Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
> 3.6mm fixed lens (6mm, 8mm, 12mm optional)
> Max. IR LEDs Length 80m
> Micro SD memory, IP67, IK10, PoE

IPC-HFW2531T-AS

5MP Lite IR Fixed-focal Bullet Network Camera

> 5MP, 1/2.7" CMOS image sensor, low illuminance high image definition
> Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 ×1520 (2688 × 1520) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in IR LED, max IR distance: 80 m
> RoI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal ac- cess, local alarm, voltage detection,audio detection
> Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card
> 12V DC/POE power support supply
> IP67 protection, IK10 protection (optional)

IPC-HFW2831T-AS

8MP Lite IR Fixed-focal Bullet Network Camera

> 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
> Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in IR LED, max IR distance: 80 m
> RoI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal ac- cess, local alarm, voltage detection,audio detection
> Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card
> 12V DC/POE power support supply
> IP67 protection, IK10 protection (optional)

IPC-HDW1230T1

2MP Entry IR Fixed-Focal Eyeball Netwok Camera

> 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
> Outputs max. 2MP (1920 × 1080) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in efficient IR illuminator, and the max. illumination distance is 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking,applicable to various monitoring scenes
> Abnormality detection: Motion detection, video tampering , network disconnection, IP conflict, illegal access
> 12V DC/PoE power supply
> IP67 protection

IPC-HDW2431TM-AS

4MP Lite IR Fixed-focal Eyeball Network Camera

> 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
> Outputs 4MP (2560 × 1440)@25/30 fps, Max. supports 4MP (2688 × 1520) @ 20 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in IR LED, max IR distance: 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering,no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
> Supports max. 256 GB Micro SD card, built-in Mic
> 12V DC/POE power supply
> IP67 protection

IPC-HDW2531T-AS

5MP Lite IR Fixed-focal Eyeball Network Camera

> 5MP, 1/2.7" CMOS image sensor,low illuminance, high image definition
> Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 ×1520 (2688 × 1520) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in IR LED, max IR distance: 40 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
> Supports max. 256 GB Micro SD card
> 12V DC/PoE power supply
> IP67 protection

NETWORK I PTZ CAMERA

SD49425XB-HNR

4MP 25x Starlight IR WizSense Network PTZ Camera

> 1/2.8" 4Megapixel CMOS
> Powerful 25x optical zoom
> Starlight technology
> Max.25/30fps@4M
> Perimeter protection
> Support PoE+
> IR distance up to 100m
> SMD PLUS
> IP66

IPC-HFW1239S1-LED

2MP Lite Full-color Fixed-focal
Bullet Netwok Camera

> 2MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
> Outputs max. 2MP (1920 × 1080) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in LEDs, max LED distance: 15 m
> ROI, SMART H.264/H.265, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access
> 12V DC/PoE power support
> IP67 protection

IPC-HFW2439S-SA-LED

4MP Lite Full-color Fixed-focal
Bullet Network Camera

> 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
> Outputs 4MP (2560 × 1440) @ 25/30 fps, Max. supports 4MP
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in warm lights, max. illumination distance: 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking,
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering, scene
> Supports max. 256 GB Micro SD card and built-in Mic
> 12V DC/PoE power supply
> IP67 protection

IPC-HDW1239T1-LED

2MP Lite Full-color Fixed-focal
Eyeball Netwok Camera

> 2MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
> Outputs max. 2MP (1920 × 1080) @25/30 fps
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in LEDs, max LED distance: 15 m
> ROI, SMART H.264/H.265, flexible coding, applicable to various bandwidth and storage environments
> Rotation mode, DWDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
> Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access
> 12V DC/PoE power support
> IP67 protection

IPC-HDW2439T-AS-LED

4MP Lite Full-color Fixed-focal
Eyeball Network Camera

> 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
> Outputs 4MP (2560 × 1440) @ 25/30 fps, Max. supports 4MP
> H.265 codec, high compression rate, ultra-low bit rate
> Built-in warm lights, max. illumination distance: 30 m
> ROI, SMART H.264+/H.265+, flexible coding, applicable to various
> Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking,
> Intelligent detection: Intrusion, tripwire
> Abnormality detection: Motion detection, video tampering, scene
> Supports max. 256 GB Micro SD card and built-in Mic
> 12V DC/PoE power supply
> IP67 protection

NVR2108HS-4KS2

8 Channel Compact 1U Lite 4K H.265 Network Video Recorder

> Smart H.265+/Smart H.264+/H.265/H.264
> Max 80Mbps incoming bandwidth
> Up to 8Mp resolution preview&playback
> Up to 1ch@8MP/4ch@1080P decoding
> HDMI/VGA simultaneous video output

NVR2116HS-4KS2

16 Channel Compact 1U Lite 4K H.265 Network Video Recorder

> Smart H.265+/Smart H.264+/H.265/H.264
> Max 80Mbps incoming bandwidth
> Up to 8Mp resolution preview&playback
> Up to 1ch@8MP/4ch@1080P decoding
> HDMI/VGA simultaneous video output

NVR4116HS-4KS2

16 Channel Compact 1U 4K&H.265 Lite Network Video Recorder

> Smart H.265+/H.265/Smart H.264+/H.264
> Max 80Mbps Incoming Bandwidth
> Up to 8MP Resolution for Preview and Playback
> Up to 2ch@4K/8ch@1080P decoding
> HDMI/VGA simultaneous video output

NVR4116HS-4KS2/L

16 Channel 1U 4K&H.265 Lite Network Video Recorder

> Smart Smart H.264+/H.265/H.264
> Max 80Mbps incoming bandwidth
> Up to 8Mp resolution preview&playback
> Max. decoding capability: 8 × 1080p@30 fps
> HDMI/VGA simultaneous video output

NVR4216-4KS2/L

16 Channel Compact 1U 4K&H.265 Lite Network Video Recorder

> Smart H.265/Smart H.264+/H.264
> Max 160Mbps Incoming Bandwidth
> Up to 8MP Resolution for Preview and Playback
> Max. decoding capability: 8 × 1080p@30 fps
> HDMI/VGA simultaneous video output

NVR4232-4KS2

32 Channel 1U 4K & H.265 Lite Network Video Recorder

> 32-channel IP video access
> Smart H.265+/Smart H.264+/H.265/H.264 H.265 auto switch
> Max 200 Mbps incoming bandwidth
> Up to 8MP resolution for preview and playback
> 8-channel decoding@1080p (30 fps)

NVR4432-4KS2

32 Channel 1.5U 4K&H.265 Lite Network Video Recorder

> Smart H.265+/H.265/Smart H.264+/H.264
> Max 200Mbps Incoming Bandwidth
> Up to 8MP Resolution for Preview and Playback
> Up to 2ch@4K/8ch@1080P decoding
> HDMI/VGA simultaneous video output

NVR4832-4KS2

32 Channel 2U 4K&H.265 Lite Network Video Recorder

> Smart H.265+/H.265/Smart H.264+/H.264
> Max 200Mbps Incoming Bandwidth
> Up to 8MP Resolution for Preview and Playback
> Up to 2ch@4K/8ch@1080P decoding
> HDMI/VGA simultaneous video output

NVR5232-4KS2

32 Channel 1U 2HDDs 4K & H.265 Pro Network Video Recorder

> 32-channel IP video access
> Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
> Max 320 Mbps incoming bandwidth
> Up to 24MP resolution for live view and playback
> 1-channel fisheye dewarping (AI by NVR)
> AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map

NVR5432-4KS2

32 Channel 1.5U 4HDDs 4K & H.265 Pro Network Video Recorder

> 32-channel IP video access
> Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
> Max 320 Mbps incoming bandwidth
> Up to 24MP resolution for live view and playback
> 1-channel fisheye dewarping (AI by NVR)
> AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map

NETWORK VIDEO RECORDERS

NVR5832-4KS2

32 Channel 2U 8HDDs 4K & H.265 Pro Network Video Recorder

> 32-channel IP video access
> Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
> Max 320 Mbps incoming bandwidth
> Up to 24MP resolution for live view and playback
> 1-channel fisheye dewarping (AI by NVR)
> AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution;heat map

NVR5464-4KS2

64 Channel 1.5U 4HDDs 4K & H.265 Pro Network Video Recorder

> 64-channel IP video access
> Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
> Max 320 Mbps incoming bandwidth
> Up to 24MP resolution for live view and playback
> 1-channel fisheye dewarping (AI by NVR)
> AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map

NVR5864-4KS2

64 Channel 2U 8HDDs 4K & H.265 Pro Network Video Recorder

> 64-channel IP video access
> Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
> Max 320 Mbps incoming bandwidth
> Up to 24MP resolution for live view and playback
> 1-channel fisheye dewarping (AI by NVR)
> AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map



NETWORK TRANSMISSION
PRODUCTS AND SOLUTIONS

PFS3006-4ET-60
6-Port 10/100Mbps Unmanaged Desktop Switch with 4 PoE Ports

> Layer two commercial switch
> Supports IEEE802.3, IEEE802.3u, IEEE802.3ab and IEEE802.3x standards
> MDI/MDIX self-adaptation
> RJ-45 port supports 10/100 Mbps self-adaptation, and confirms to 802.3at, and 802.3af power supply standards
> Port 1 supports Hi-PoE 60W power supply
> 250 m PoE power supply
> Wall mounting and mechanical anti-thef
> 53V DC power supply
> Supports PoE watchdog

PFS3010-8ET-96
10-Port Unmanaged Desktop Switch with 8-Port PoE

> Intelligent PoE
> 8-pin assignment PoE power supply
> Long distance PoE
> PoE watchdog
> Wide working temperature

PFS4218-16ET-190
16-port 100 Mbps + 2-port Gigabit Managed PoE Switch

> Intelligent PoE
> Red port supports 90W IEEE802.3bt
> Web management with friendly interface and easy operation
> 250 m long distance PoE transmission
> PoE watchdog
> Plug and play

PFS4226-24ET-240
24-port 100 Mbps + 2-port Gigabit Managed PoE Switch

> Intelligent PoE
> Red port supports 90W IEEE802.3bt
> Web management with friendly interface and easy operation
> 250 m long distance PoE transmission
> PoE watchdog
> Plug and play

PFS4226-24ET-360
24-port 100 Mbps + 2-port Gigabit Managed PoE Switch

> Intelligent PoE
> Red port supports 90W IEEE802.3bt
> Web management with friendly interface and easy operation
> 250 m long distance PoE transmission
> PoE watchdog
> Plug and play